




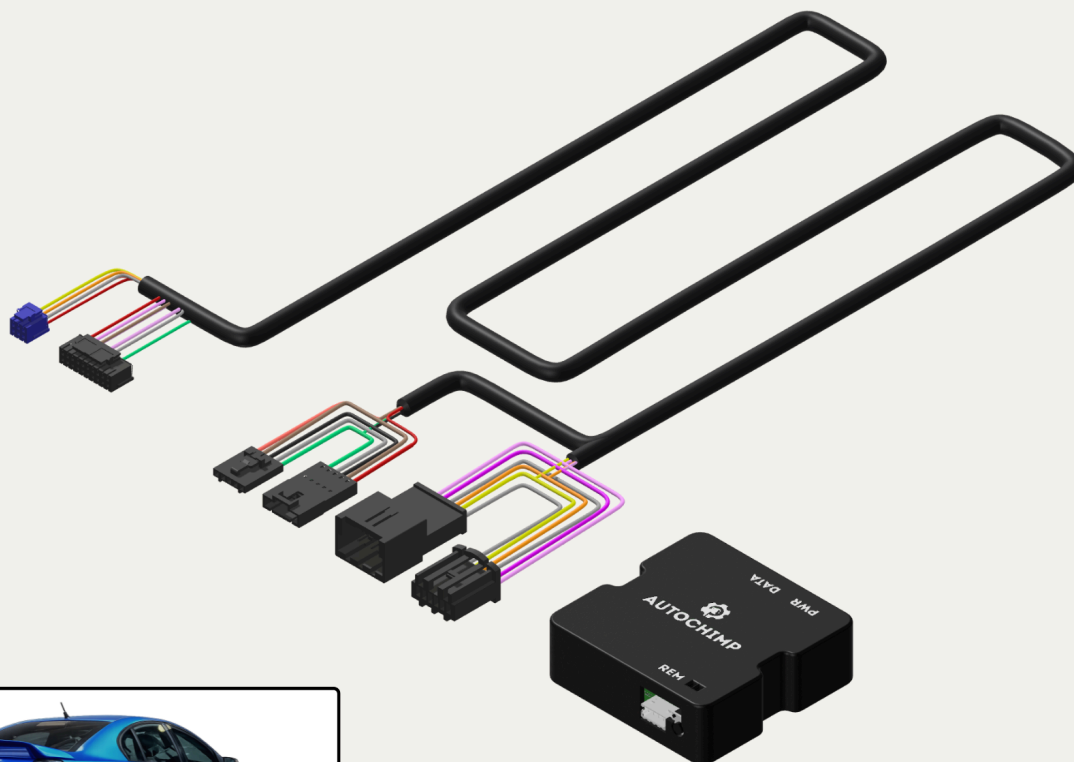

Built for Holden VE
Commodore
(2006 - 2013)

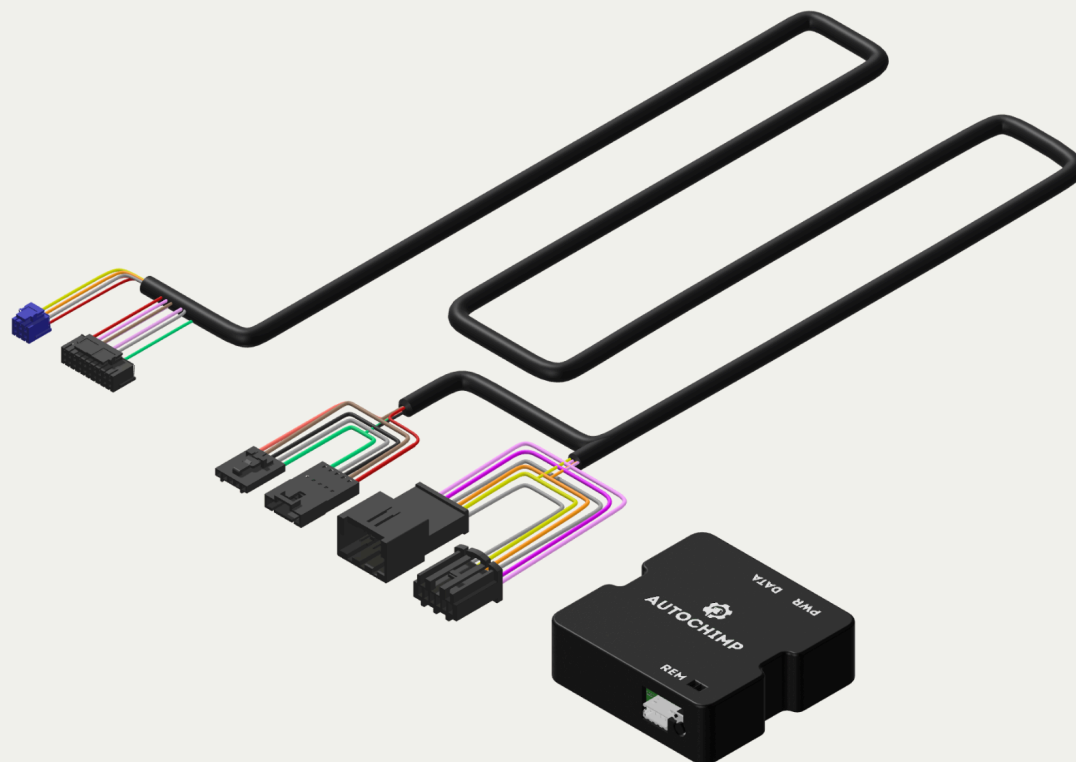

KIT CONTENTS

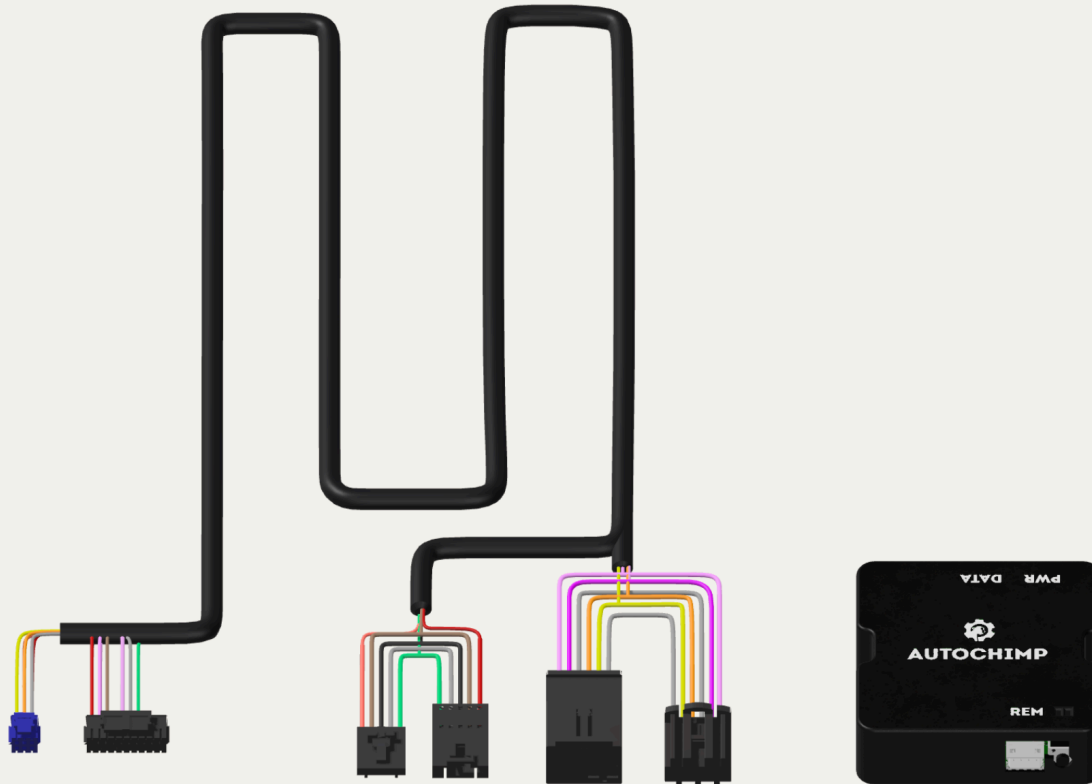

Vehicle Interface Harness for Holden
VE Commodore

Remote Start
Interface Module

SKU: AC-RS-VE-AUTO

REMOTE START EXPLAINED

The AutoChimp™ Remote Start Module connects to the vehicle using a plug & play harness, allowing remote start operation from the factory key remote without additional remotes.



Using the factory vehicle remote.
Press LOCK - UNLOCK - LOCK to remote start the vehicle.

*Any future factory remotes you pair to vehicle will also work.

VEHICLE COMPATIBILITY

Designed for Holden VE Commodore (2006–2013), WM Statesman (2006–2013) and WM Caprice (2006–2013).

Compatible with supported VE and WM automatic transmission vehicles across Series 1 and Series 2 platforms.




Vehicle compatibility may vary depending on model, trim level and factory configuration.

HOW IT WORKS

The AutoChimp™ Remote Start Control Module manages vehicle remote start functionality and communicates with the vehicle through the AutoChimp™ Vehicle Interface Harness.


The system is pre-configured for supported VE and WM platform vehicles and operates using the factory remote start sequence after installation and vehicle learning.

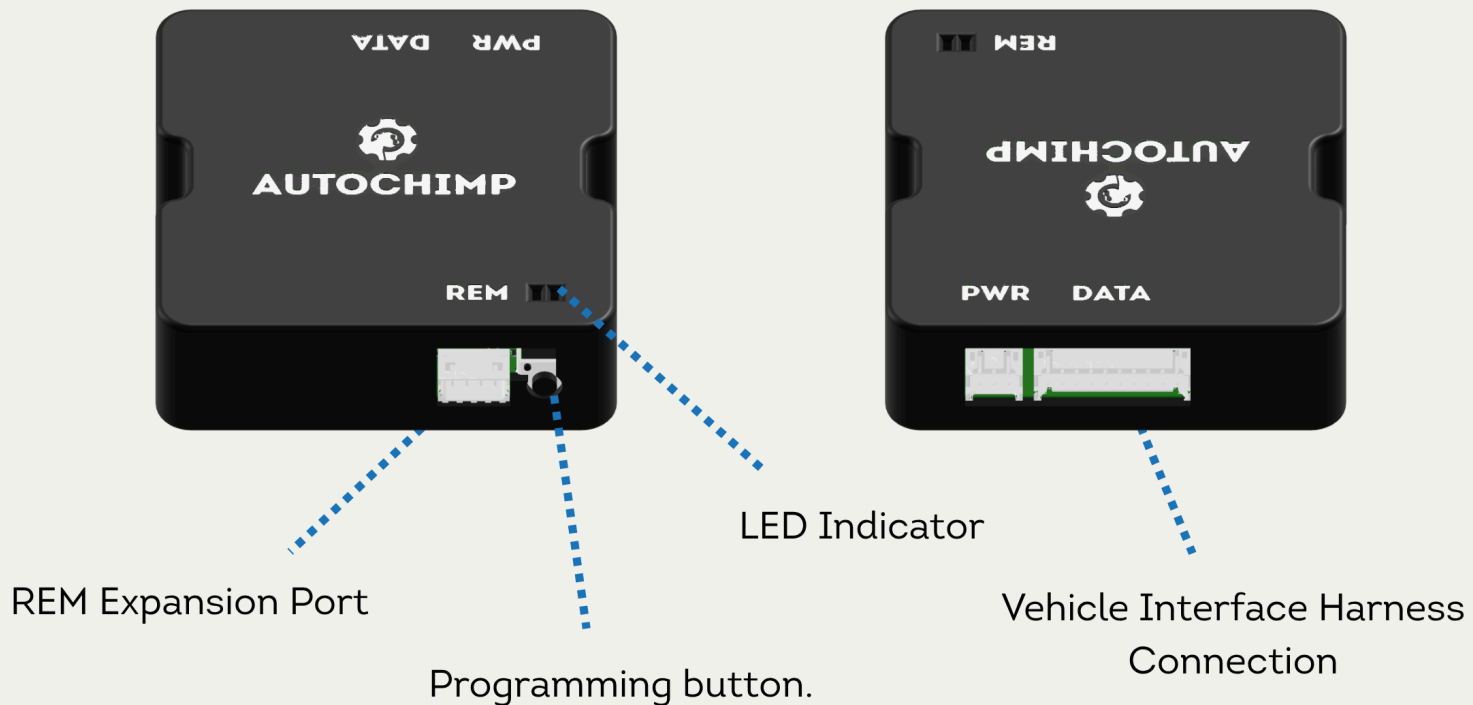

SKU: AC-RS-VE-MODULE

VE VEHICLE INTERFACE HARNESS


Designed for Holden VE Commodore (2006–2013), WM Statesman (2006–2013) and WM Caprice (2006–2013), this plug & play Vehicle Interface Harness integrates directly with the vehicle using OEM-style connectors. No cutting, no coding – just a clean installation for compatible AutoChimp™ Remote Start Systems.

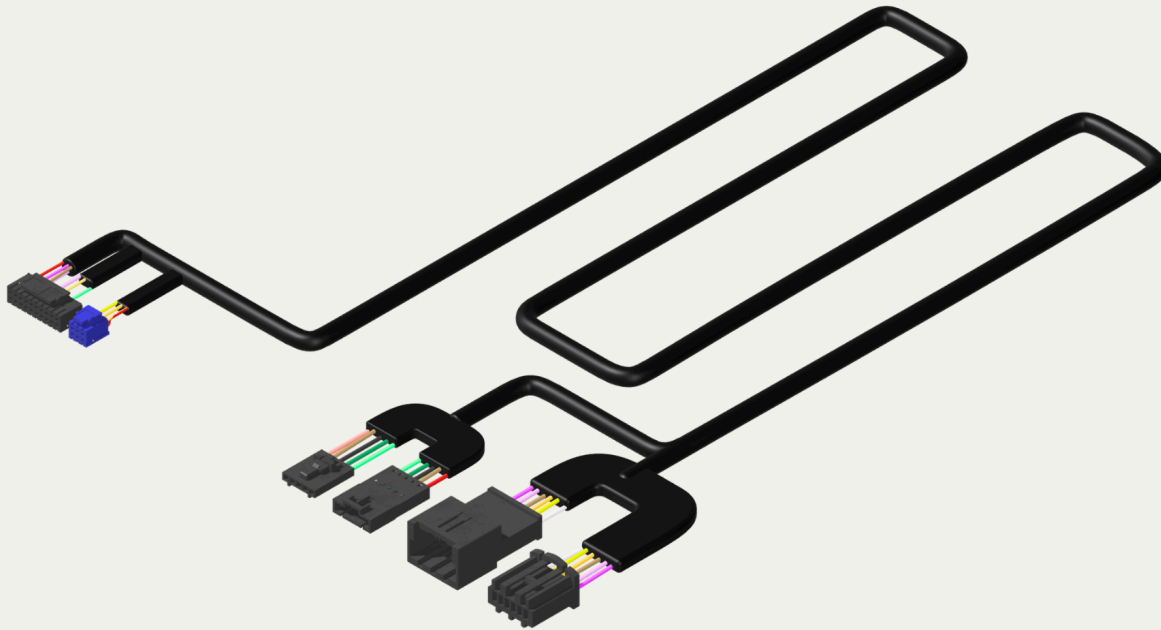

SKU: AC-RS-VE-HARNESS

INSTALLATION GUIDE

The AutoChimp™ Vehicle Interface Harness connects the Remote Start Module to the vehicle using a plug & play T-harness design.


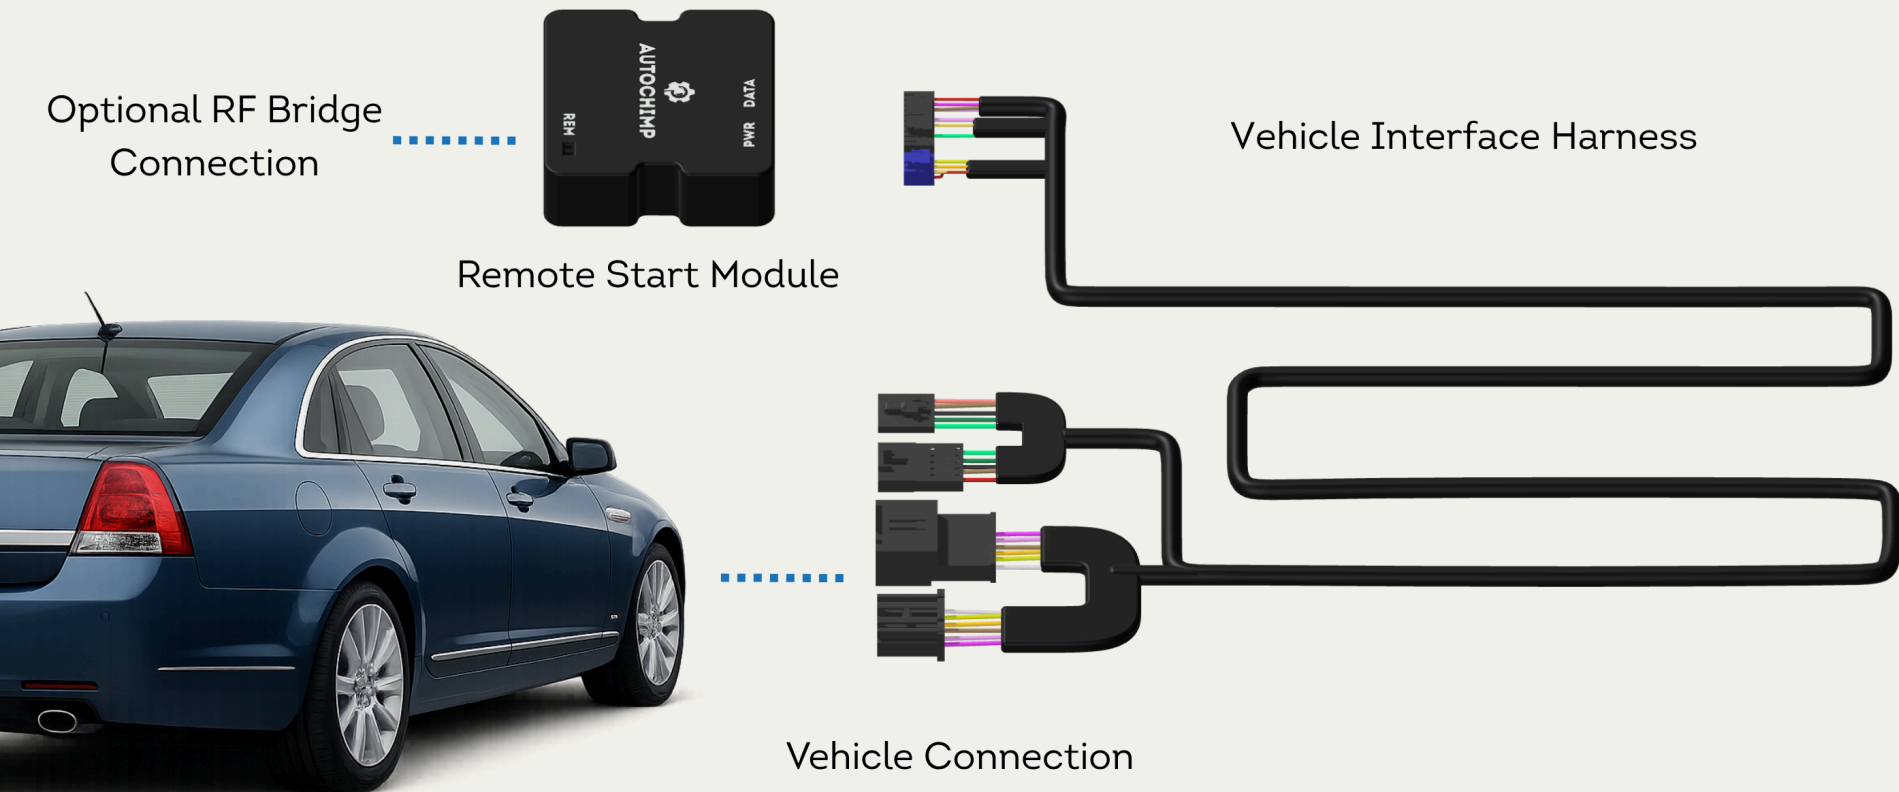


Remote Start Module included. RF Bridge sold separately.

TRIM REMOVAL

Remove the top shroud first, then remove the lower steering column shroud to gain access to the retaining screws and to the factory ignition and immobiliser connection points.

Once removed, both factory connectors are easily accessible for plug-and-play installation of the AutoChimp™ Vehicle Interface Harness.

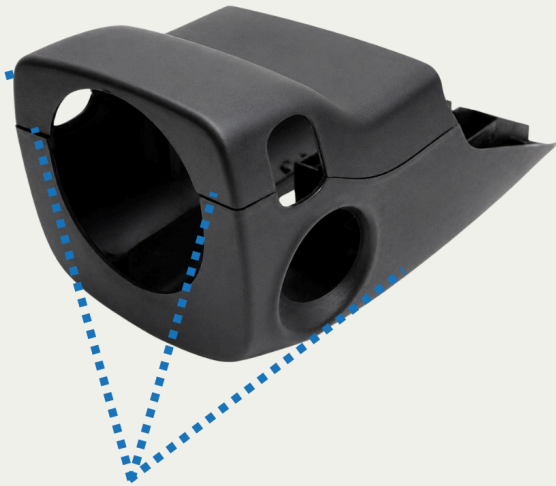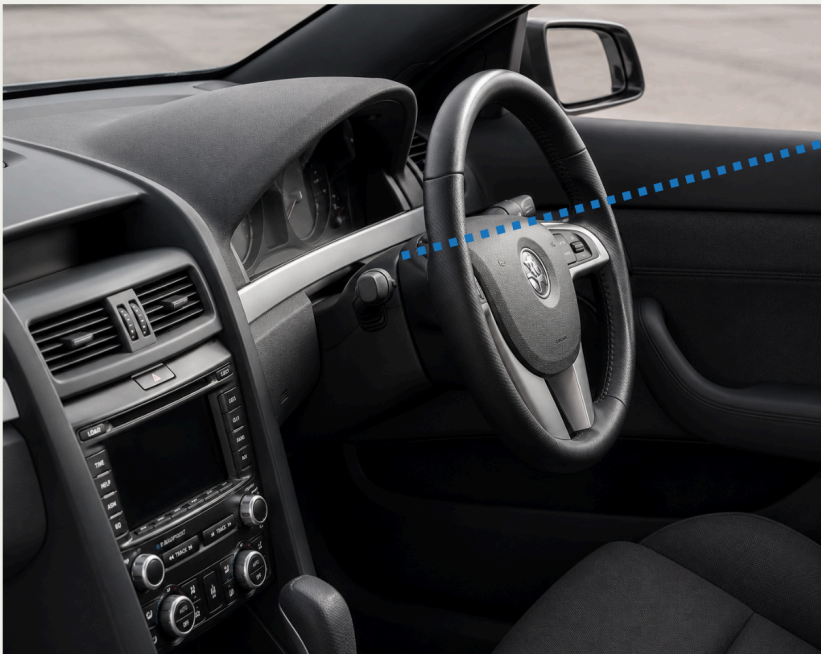

Remove screws located here after removing top cover.

SKU: AC-RS-VE-HARNESS

CONNECTION LOCATION

The AutoChimp™ Vehicle Interface Harness plugs inline between the factory connectors and vehicle wiring using OEM-style connections.

Locate the factory Key Reader Connector and main Ignition Switch Connector beneath the steering column.



Ignition Connector




Key Reader Connector

SKU: AC-RS-VE-HARNESS

CONNECTION GUIDE

Locate the main Ignition Switch Connector beneath the steering column. Release the red locking tab, press the black release tab and disconnect the connector.

Pull the steering column forward if additional access is required.

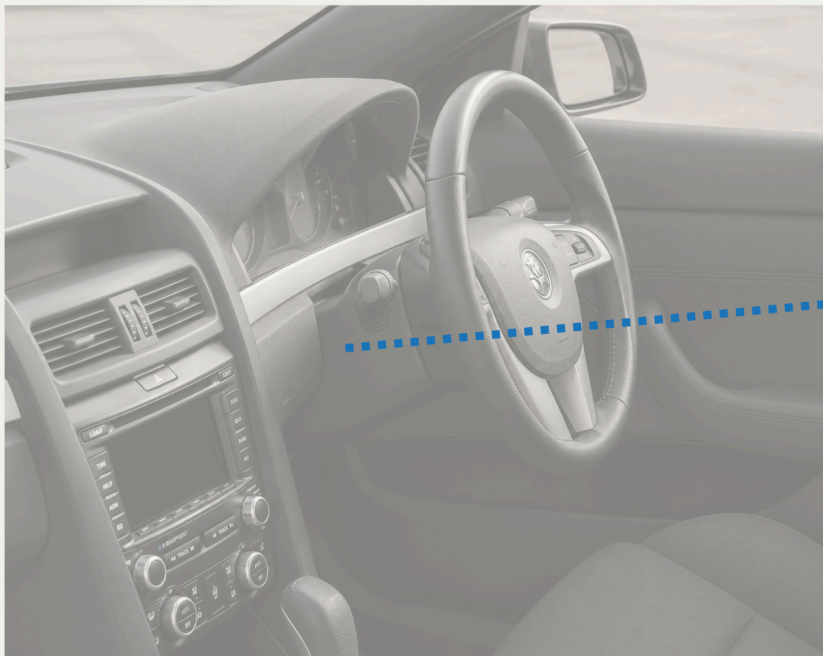


Ignition Connector



Red locking tab slides out, use a small flat blade or pick.

EXAMPLE CONNECTION

Harness kit plugs inline directly into rear of main Ignition Connector & Key Reader. Original connectors plug into rear of AutoChimp™ harness kit.

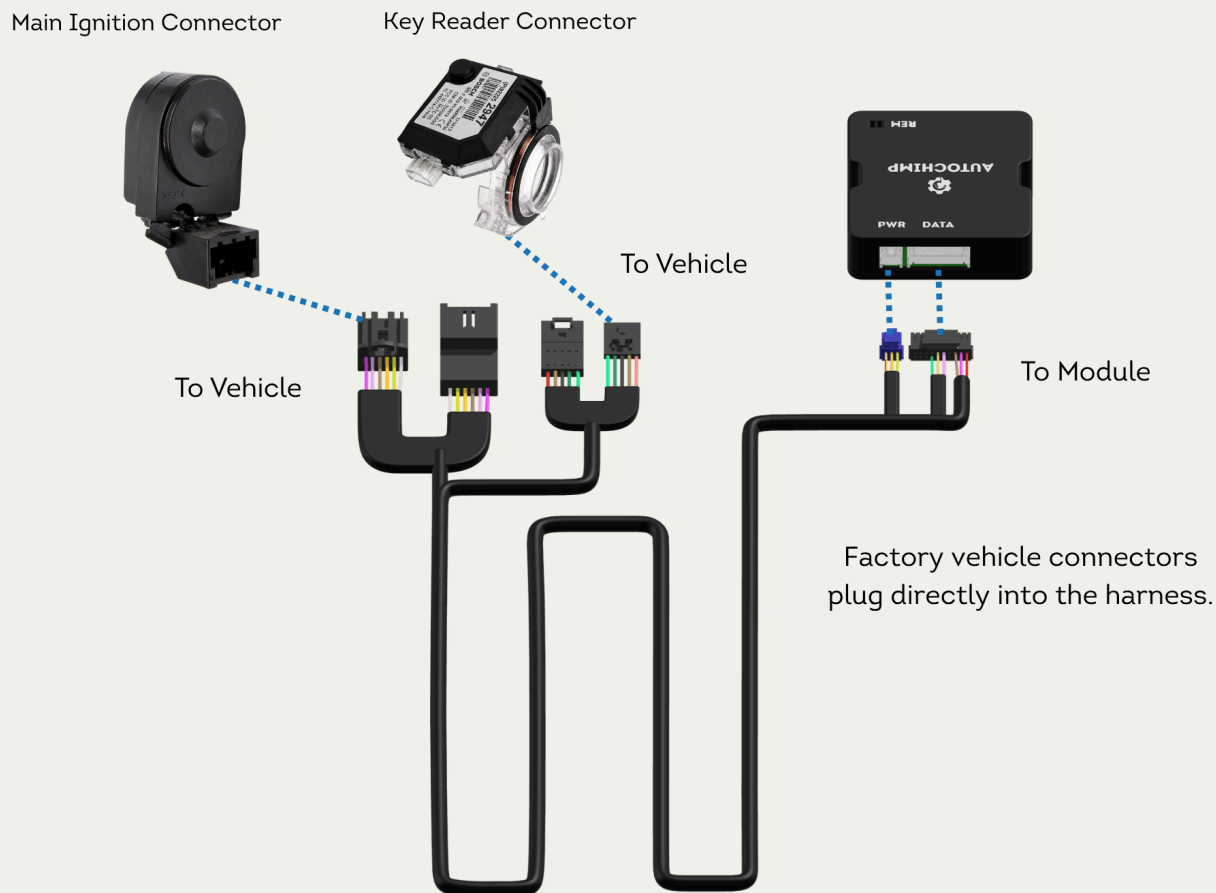

SETUP & PROGRAMMING

Programming button.



Status LED shows either **RED** or **GREEN**

1. Install the AutoChimp™ Vehicle Interface Harness and Remote Start Module.
2. Turn the ignition key to ACCESSORY.
3. Verify the status LED illuminates **RED**.
4. Start the vehicle and verify the status LED illuminates **GREEN**.
5. Allow the vehicle to reach normal operating temperature.
6. Press and hold the brake pedal.
7. Press and hold the programming button.
8. Release the programming button when the status LED begins flashing **RED** rapidly.

Vehicle learning is now complete.

Status LED Indicator

LONG RANGE REMOTES

The REM port allows connection of compatible AutoChimp™ accessories, including the AutoChimp™ RF Bridge, for optional long-range remote-control functionality.




*Compatible remote kits sold separately.

**RF Bridge sold separately.

CABLE LENGTHS

Overall Cable Length:
1000mm

Module Connection
Cables: 80mm

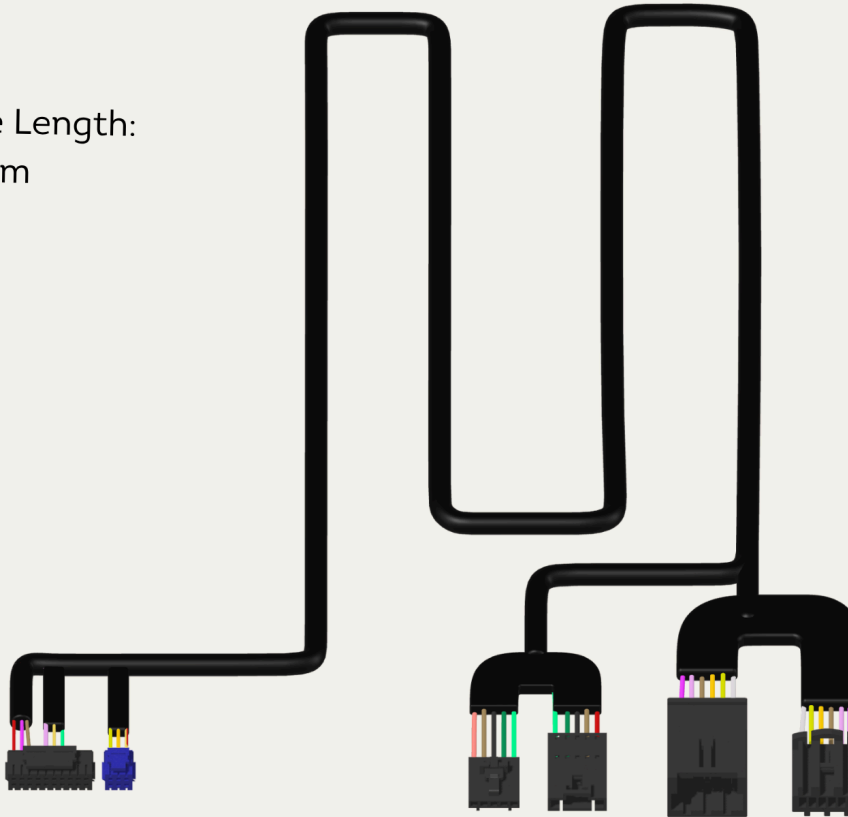


Vehicle Connection
Cables: 100mm

PROTECTED HARNESS DESIGN


To improve durability and installation quality, the AutoChimp™ VE Vehicle Interface Harness incorporates automotive-grade protective loom sleeving around exposed wiring sections.

This helps protect against abrasion while maintaining a clean factory-style appearance.


Unprotected Harness

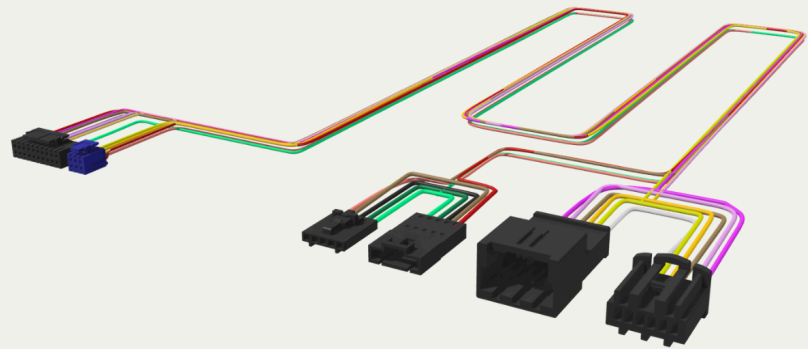

AutoChimp™ Protected Harness

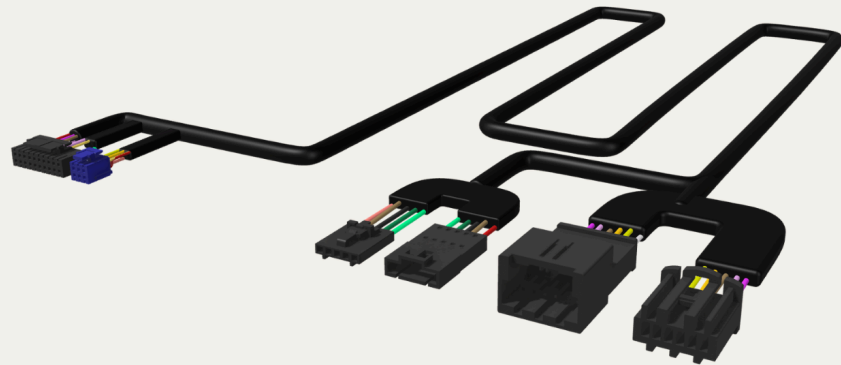

WHAT'S INCLUDED

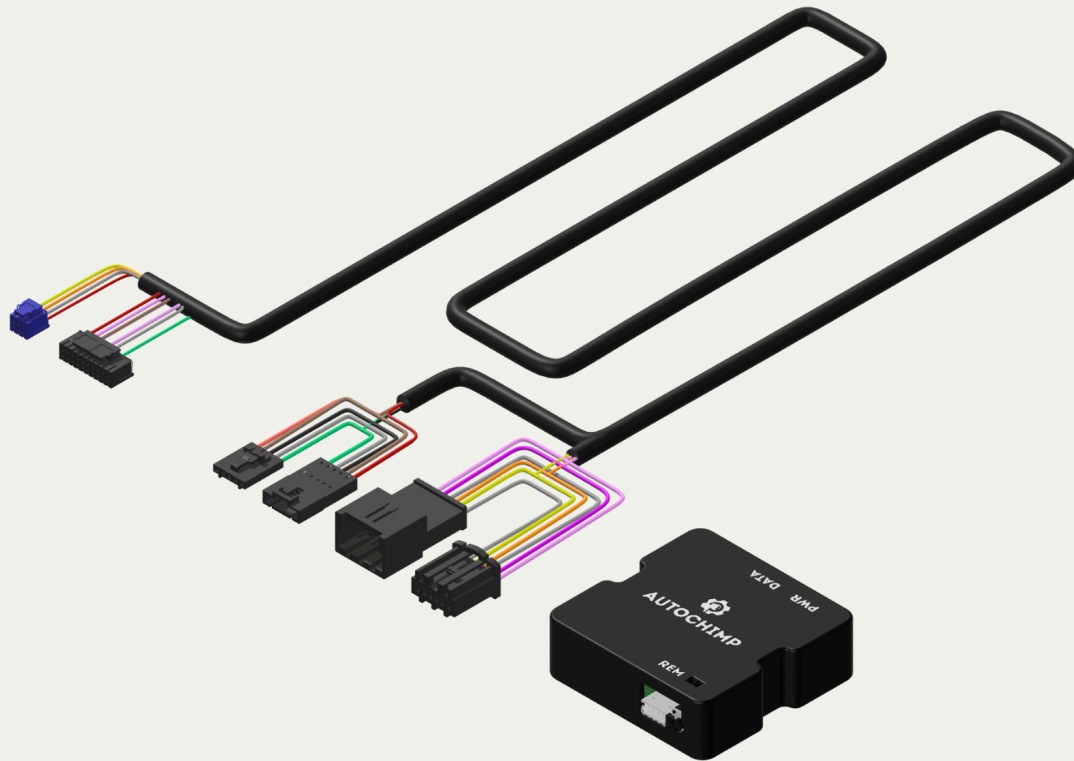

SKU: AC-RS-VE-AUTO

INSTRUCTIONS

REMOTE START KIT FOR HOLDEN VE COMMODORE

SKU: AC-RS-VE-AUTO · 2006–2013 automatic

Scan for the install walkthrough on our website: the full video guide, wiring detail and the programming sequence for your remotes.

INSTALL VIDEO

WIRING DETAIL

REMOTE PROGRAMMING

Or type autochimp.com.au/guide/ac-rs-ve-auto



VIDEO GUIDE

Stuck? SMS +61 411 101 737, Mon–Fri 10am–4pm AEST

3-year warranty · see the warranty card in this box



LOGIN & RETURNS

Scan the code with your phone camera to open your AutoChimp account. No password needed — we email you a six-digit code.

- Track your order and download tax invoices
- Start a return, exchange or warranty claim
- Lodge a Shipping Protection claim
- Find every install guide for what you bought

accounts.autochimp.com.au · support@autochimp.com.au



YOUR ACCOUNT